


GENERAL NOTES:


- PO: ENP-CORTEM-2024-PO-200
- ITEM NO : 4
- QUANTITY : 2 NOS
- J.B MATERIAL : 316L STAINLESS STEEL
- EXTERNAL PAINTING : NOT PAINTED (NATURAL SS COLOUR)
- INTERNAL PAINTING : NOT PAINTED (NATURAL SS COLOUR)
- REMOVABLE GLAND PLATE WITH THICKNESS 3mm
- TAG PLATE MATERIAL : STAINLESS STEEL
(BLACK TEXT ON NATURAL BACKGROUND) FIXED BY SS316 RIVETS
- ALL DIMENSIONS ARE IN MILLIMETERS [mm]

TAG NAME	Q.TY	TEXT	DIMENSIONS [mm]
TAG	1	JBD-D-RU0001A-02	80x30
TAG	1	JBD-D-RU0001B-02	80x30


BOTTOM SIDE
 REMOVABLE GLAND PLATE 3MM THICKNESS
 3I: N.1 Ø 32.5mm NOT THREADED HOLE
 2I: N.1 Ø 25.5mm NOT THREADED HOLE
 1I: N.7 Ø 20.5mm NOT THREADED HOLE
 ECD - N.1 Ø 20.5mm NOT THREADED HOLE

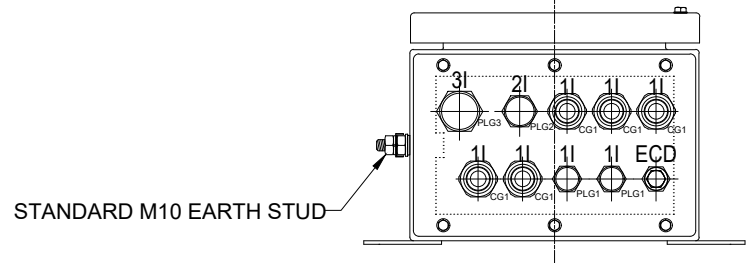


RIGHT SIDE

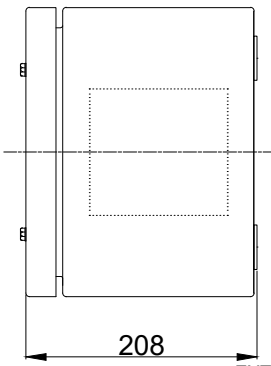

EXTERNAL VIEW

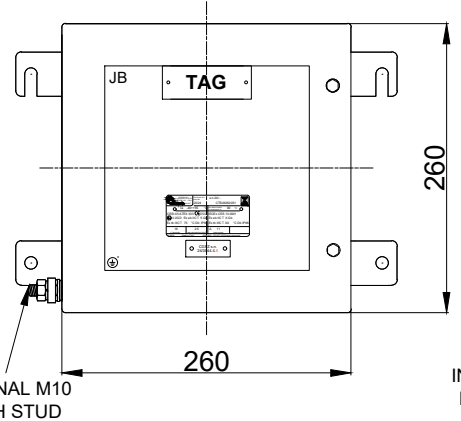


INTERNAL VIEW

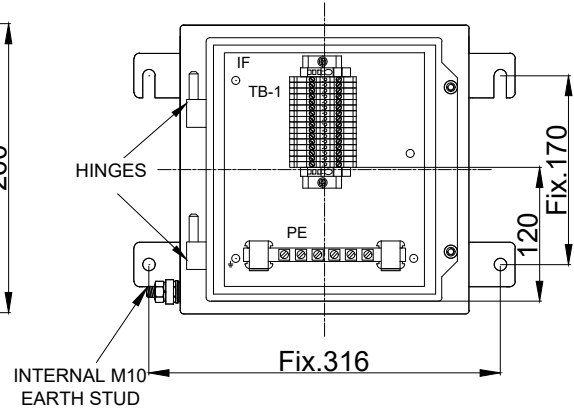

CERTIFICATE NAME PLATE

MATERIAL : SS316L FIXED BY SS316 RIVETS


CORTEM GULF S.N. NAMEPLATE
 SS316L name plate fixed by Rivets

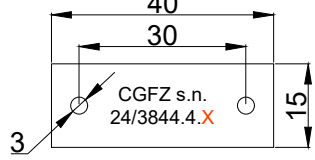

X To be from 1-2

CORTEM SpA VIA AQUILEIA 10 34070 VILLESSE - GO ITALY		Enclosures with terminals: 2024	s.n.24/... CTB262620S1
○ Ta -40++55 °C	Use cables suitable for temperature of: 90 °C		
CESI 03 ATEX 333 (C)0722	IECEX CES 13.0001		
⊕ II 2GD Ex eb IIC T 5 Gb	Ex eb IIC T 5 Gb		
Ex tb IIIC T 75 °C Db IP66	Ex tb IIIC T 75 °C Db IP66		
16 n° terminals	2.5 max wire section [mm²]	A 11 max current	
U-386IN Made in ITALY WARNING - DO NOT OPEN when energized			

TB DETAIL

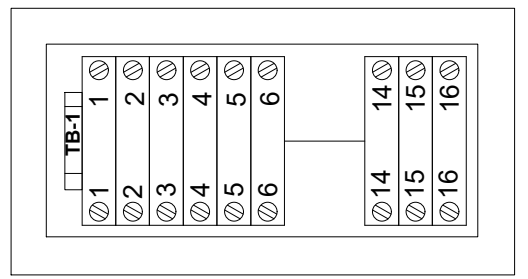

REV.	DATE	PREP'D	CHK'D	APP'D	DESCRIPTION
1	10/12/2024	S.M	S.T	S.T	RE ISSUED FOR APPROVAL
0	22/11/2024	S.M	S.T	S.T	ISSUED FOR APPROVAL

DRAWING TITLE	ENER PROCESS FZ- LLC	
	GENERAL ARRANGEMENT DRAWING CORTEM GULF FZCO	
CORTEM GULF JOB N°	CGFZ-3844	CORTEM GULF (FZCO) RA08AB06 JAFZA P.O.BOX 17123, DUBAI, UAE TEL: 00971 4 8062000

DRAWING NUMBER	CGFZ-3844-4	SHEET 1 / NEXT /

